

500
series

EXPAND YOUR CAPABILITIES

YOU KNOW YOU CAN

- Ethernet port for connecting to a computer running Sennheiser Wireless Systems Manager (WSM) software. WSM provides complete control and monitoring of multichannel wireless systems
- Wireless sync of transmitters via infrared interface
- Enhanced frequency bank management with AutoScan for up to 32 compatible frequencies
- Increased audio sensitivity range
- Large, illuminated dot matrix-display with warning indicator
- More control options (menu)
- Enhanced AF frequency range
- Guitar cable emulation simulates length of guitar cable
- Switchable RF output power (10 mW/30 mW)
- Backpack and handheld transmitters equipped with charging contacts
- Integrated guitar tuner in receiver
- Soundcheck mode
- Integrated equalizer
- 2 AA batteries for more than 8 hours of use
- Receiver shows 4-level indicator for transmitter battery
- Contacts for recharging the BA 2015 G2 accupack directly in the transmitter
- HDX compander for crystal-clear sound
- True diversity receiver for optimum reception
- Includes installation kit for 19" rack mounting (1 U)
- Professional grade e 900 microphone capsules
- Professional MKE 2-ew Gold lavalier included with ew 512 G3
- Backwards compatible with evolution wireless G1 and G2 series, as well as Sennheiser 2000 Series wireless systems



SK 500 G3



EM 500 G3 WITH GA 3 RACKMOUNT KIT

PRESENTATION SET

INSTRUMENT SET

VOCAL SET

WIRELESS TRANSMITTER SYNCHRONIZATION VIA ONE-TOUCH INFRARED INTERFACE saves valuable time

EXPANDED AUDIO SENSITIVITY RANGE for precise control of input levels

ENHANCED FREQUENCY BANK MANAGEMENT with up to 32 compatible frequencies in 26 banks

ENHANCED AUDIO FREQUENCY RESPONSE for stunning detail

AVAILABLE ACCESSORIES

GA 3 19" RACKMOUNT ADAPTER
Allows for easy mounting of G3 components in a standard 19" rack enclosure; one GA 3 can mount either one or two G3 units in a 1U space.

AC 3/NT ACTIVE ANTENNA COMBINER
Combines up to four SR 300 G3 monitor transmitters to one antenna while distributing power via BNC antenna connections - includes NT3-1 power supply.

NT 1-1 POWER SUPPLY
For use with ASA 1 antenna splitter or L 2015 G2 charger.

KEN 3 SKM IDENTIFICATION RINGS
Exchangeable color-coded rings for the quick identification of ew G3 hand-held transmitters.

BA 2015 G2
Rechargeable Battery Packs
NiMH rechargeable battery pack for use with all G3 battery powered transmitters and receivers. Requires L 2015 G2 charger.

HSP 2-EW HEADWORN OMNIDIRECTIONAL MICROPHONE
Available in beige or black, modular beta titanium construction with dual-ear, secure fit.

CL 2 LINE INPUT CABLE
1/8" to XLR-F cable for use with SK 100/300/500 transmitters.

CA 2 CAMERA-MOUNT ADAPTER
Mounting adapter for use with video cameras equipped with hot shoe mount.

ASA 1/NT ACTIVE ANTENNA SPLITTER
Shares antennas amongst multiple receivers. The ASA 1 distributes diversity antenna signals and DC power to up to four (4) ew G3 EM receivers. Two (2) ASA 1 may be cascaded for an 8-channel antenna system.

A 1031-U
Wideband, omnidirectional UHF paddle antenna.

AM 2 ANTENNA CABLES
For use in conjunction with the GA 3 rackmount kit, the AM 2 allows whip antennas to be front-mounted to improve reception and line of sight for your wireless system.

NT 3-1 POWER SUPPLY
For use with AC 3 active antenna combiner or up to three (3) L 2015 G2 chargers.

MZW 1 WINDSCREEN
Protective foam cover for handheld transmitter capsules to minimize wind and plosive sounds.

L 2015 INTELLIGENT QUICK-CHARGE BATTERY CHARGER
Compatible with BA 2015 G2 batteries, the L 2015 G2 will directly charge two (2) battery packs in bodypack transmitters, or in SKM handhelds (requires LA 2 SKM adapter). Requires either NT 1-120 power supply (for 1 charger) or NT 3-120 (for up to 3 chargers)

AB 3 ANTENNA BOOSTER
+10 dB antenna booster, frequency range specific - provides additional gain to make up for cable loss associated with long cable runs.

HSP 4-EW HEADWORN CARDIOID MICROPHONE
Available in beige or black, modular beta titanium construction with dual-ear, secure fit.

RMS 1 REMOTE MUTE SWITCH
For use exclusively with SK 300 G3, the RMS 1 allows for easy access to the multi-functional mute options of the 300 Series transmitter.

CC 3 CARRY CASE
High impact, plastic carrying case for use with ew G3 systems and components.

DC 2 DC POWER ADAPTER
For external powering (12V) of portable evolution receivers and transmitters instead of two (2) AA batteries. Pigtail leads.

SENNHEISER CANADA INC.
221 Labrosse Avenue, Pointe-Claire, Quebec H9R 1A3
Tel: 1-800-463-1006 • Fax: 1-800-463-3953

www.sennheiser.ca

evolution wireless G3

YOU KNOW YOU CAN

SENNHEISER

INTRODUCING EVOLUTION WIRELESS Generation 3

TRUE DIVERSITY RECEIVER

- Ethernet port for connecting to the (WSM) Wireless Systems Manager software
- Infrared interface for wireless synchronization of transmitters
- Headphone jack for direct monitoring



CLEAR, DISTINCT TRANSMISSION with professionally-engineered microphone capsules.

EASY TO EXCHANGE MICROPHONE CAPSULES

Choose what's best for you, install without tools.


MENU CONTROL is made simple with the large dot-matrix display.

YOU KNOW YOU CAN

SET NEW STANDARDS



MONITORING SET

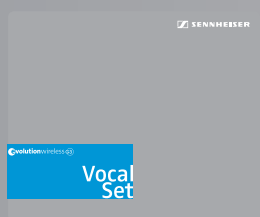

VOCAL SET



HEADWORN SET



PRESENTATION SET




SR 300 IEM G3 WITH GA 3 RACKMOUNT KIT



EM 300 G3 WITH GA 3 RACKMOUNT KIT



SKM 300 G3 835/845/865

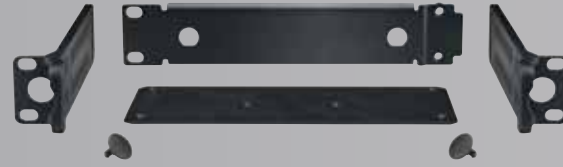

SK 300 G3



- Ethernet port for connecting to a computer running Sennheiser Wireless Systems Manager (WSM) software. WSM provides complete control and monitoring of multichannel wireless systems
 - Wireless sync of transmitters via infrared interface
 - Enhanced frequency bank management with AutoScan for up to 24 compatible frequencies
 - 42 MHz bandwidth, 1,680 switchable frequencies
 - Increased range for audio sensitivity
 - Large, illuminated dot-matrix display with warning indicator
 - More control options (menu)
 - Enhanced AF frequency range
 - Soundcheck mode
 - Integrated equalizer
 - Switchable RF output power (10 mW/30 mW)
 - Optional remote switch (RMS1)
 - Configurable mute modes
 - Easy-to-reach configurable mute button on handheld
 - Handheld transmitters with charging contacts
 - 2 AA batteries for more than 8 hours of use
 - Receiver shows 4-level indicator for transmitter battery
 - Contacts for recharging the BA 2015 accupack directly in the transmitter
 - HDX compander for crystal-clear sound
 - True diversity receiver for optimum reception
 - Includes installation kit for 19" rack mounting (1 U)
 - Backwards compatible with evolution wireless G1 and G2 series, as well as the Sennheiser 2000 Series wireless systems
- WIRELESS MONITOR SET**
- SR 300 IEM transmitter with Ethernet port for use with WSM
 - Enhanced frequency bank with up to 16 compatible channels per bank
 - Receiver with Adaptive Diversity technology
 - Combined balanced XLR/1/4", TRS audio inputs
 - Balanced 1/4" audio loop outputs
 - 5-Band graphic EQ in transmitter
 - Variable, 4-level audio limiter in receiver
 - Includes GA 3 for 19" rack mounting (1 U)
 - Backwards compatible with evolution wireless G1 and G2 series, as well as the Sennheiser 2000 Series wireless systems

EK 300 IEM G3

IE 4

MZQ 1

ME 3-EW

ME 2

ME 4

EW 300 IEM G3

EW 335 G3

EW 345 G3

EW 365 G3

EW 352 G3

EW 312 G3

EW 322 G3

YOU KNOW YOU CAN

COUNT ON BREAK-THROUGH SOUND



VOCAL SET




INSTRUMENT SET



HEADWORN SET



PRESENTATION SET



ENG SET



PORTABLE SET



EM 100 G3



EK 100 G3



SKM 100 G3 - 835/845/865

SK 100 G3



ME 2



SK 100 G3



SK 100 G3



SKM 100 G3



MZQ 1



CI 1 INSTRUMENT CABLE



ME 3-EW



ME 2



ME 4



SKP 100 G3



ME 2



ME 4



MZQ 1

EW 135 G3

EW 145 G3

EW 165 G3

EW 172 G3

EW 152 G3

EW 110 G3 LE

EW 112 G3

EW 114 G3 LE

EW 122 G3

EW 100 ENG G3

EW 112P G3

EW 122P G3

EW 135P G3

- Wireless sync of transmitters via infrared interface
- Enhanced frequency bank management with AutoScan for up to 12 compatible frequencies per bank
- 42 MHz bandwidth, 1,680 switchable frequencies
- Easy-to-read illuminated dot-matrix display
- Receiver shows 4-level indicator for remaining transmitter battery life
- More control options (menu)
- Enhanced AF frequency range
- Increased range for audio sensitivity
- Soundcheck mode
- Integrated equalizer
- Guitar cable emulation simulates length of guitar cable
- Contacts for recharging the BA 2015 G2 accupack directly in the transmitter
- Integrated guitar tuner in receiver
- Portable receivers have adaptive diversity technology for reliable reception
- Easy-to-exchange handheld capsules
- 2 AA batteries for more than 8 hours of use
- HDX compander for crystal-clear sound
- True diversity receiver for optimum reception
- High RF output power for large range
- Suitable for 19" rack mounting (1 U)
- Backwards compatible with evolution wireless G1 and G2 series, as well as the Sennheiser 2000 Series wireless systems